

1 MAGNA1 65-120 F



MAGNA1 -

MAGNA1

MAGNA1

EuP.

: -10 .. 110 °C  
 : 60 °C  
 : 983.2 / 3

TF : 110  
 : CE,VDE,EAC


EN-GJL-250  
 ASTM A48-250B  
 PES 30%GF

: 0 .. 40 °C




: 10  
: DIN  
: DN 65  
: PN6/10  
: 340  
:  
-P1: 24.38 .. 774  
: 50 Hz  
: 1 x 230  
: 0.26 .. 3.42 A  
(IEC 34-5): X4D  
(IEC 85): F

:  
: (EEI): 0.18  
: 21.6  
: 23.8  
: 57.4 <sup>3</sup>


## MAGNA1 65-120 F 50

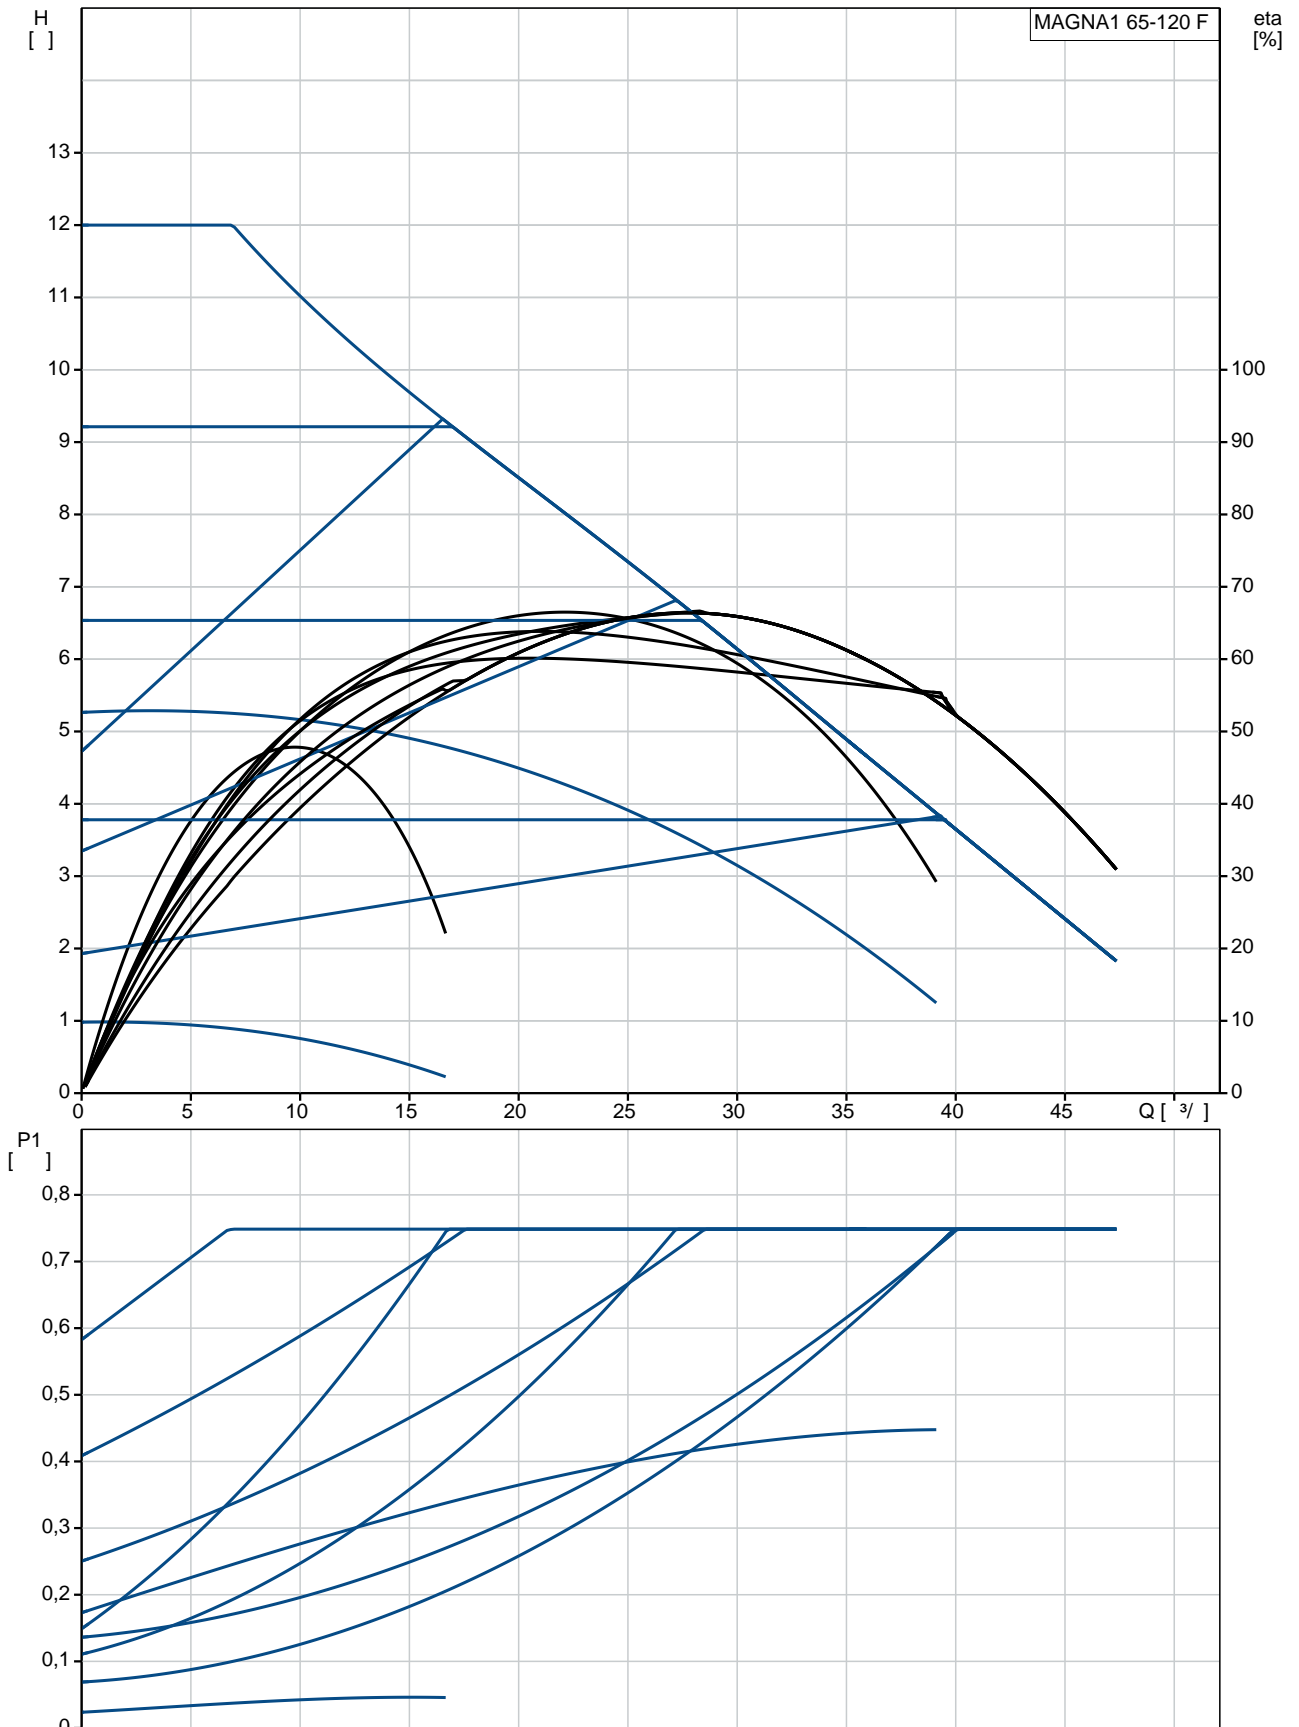


		MAGNA1 65-120 F
EAN		
TF		120 110 CE, VDE, EAC B
		EN-GJL-250 ASTM A48-250B PES 30%GF
		0 .. 40 °C
		10 DIN DN 65 PN6/10 340
		-10 .. 110 °C 60 °C 983.2 / 3
	-P1:	24.38 .. 774
		50 Hz
		1 x 230
		0.26 .. 3.42 A
	(IEC 34-5):	X4D
	(IEC 85):	F
	(EEI):	0.18
		21.6
		23.8
		57.4 3

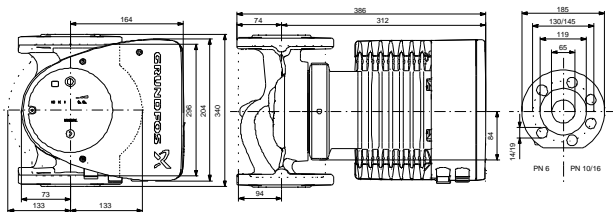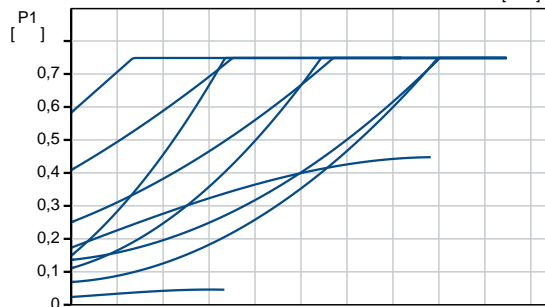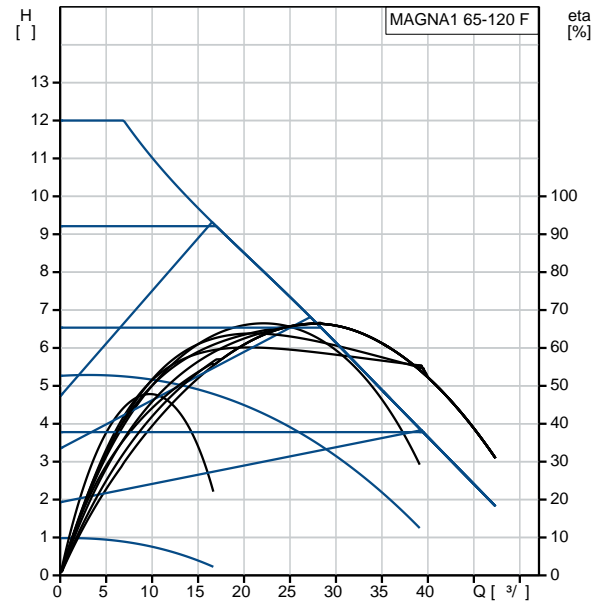

Example of mains-connected motor with mains switch, backup fuse and additional protection

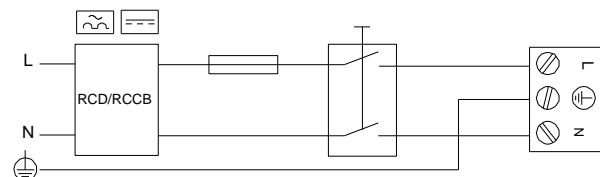


## MAGNA1 65-120 F 50

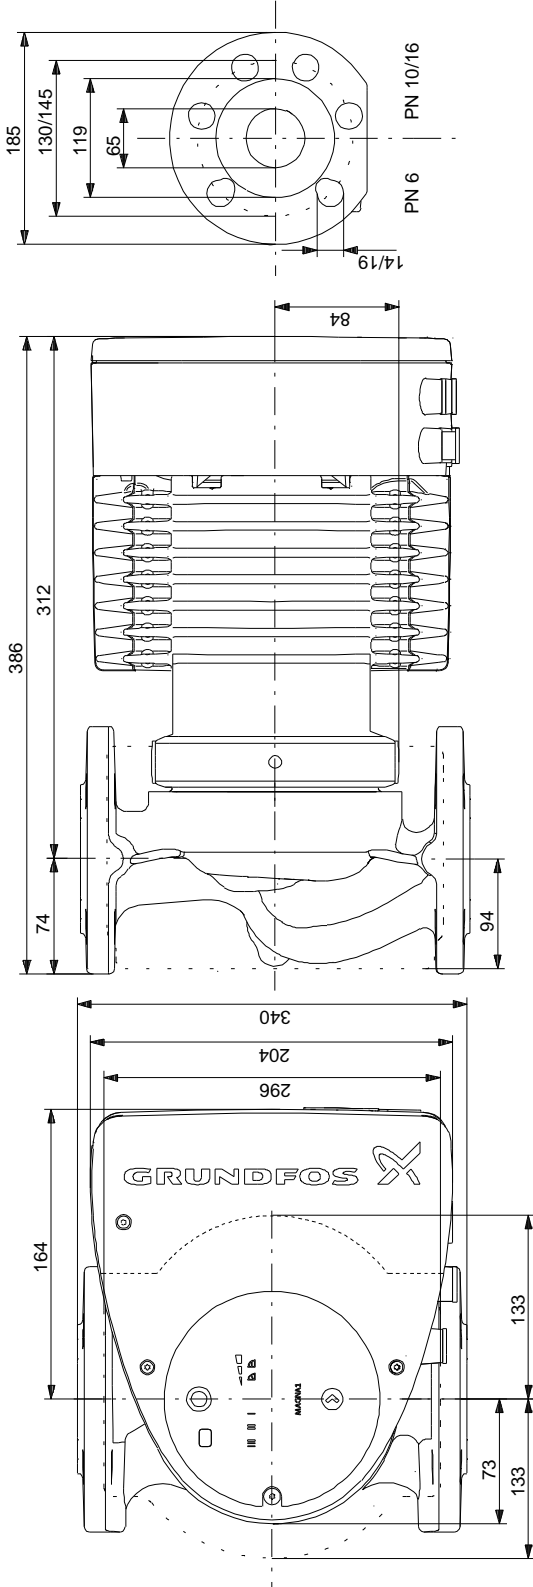

**MAGNA1 65-120 F 50**

Example of mains-connected motor with mains switch, backup fuse and additional protection

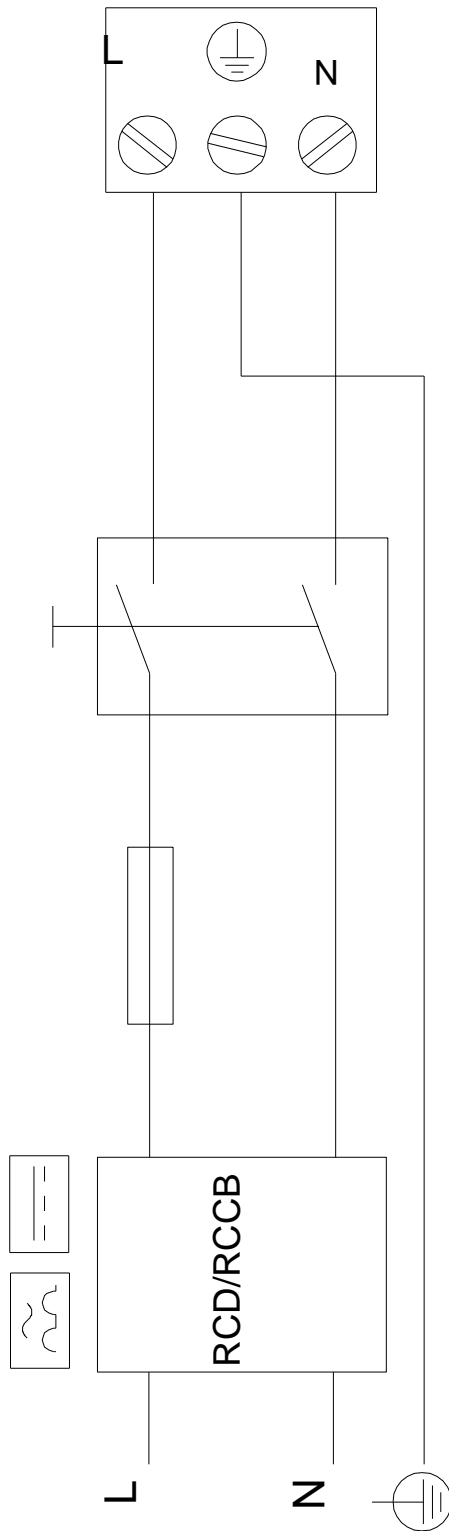

! [ ], .