



## ALPHA2 25-40 130

AUTOADAPT

(EEI) -

N)

, Energieeinsparverordnung - EnEV § 14

ALPHA2

ALPHA.

<0,8

: 2 .. 110 °C

60 °C

983.2 / ³

TF

110

: VDE,GS,CE

EN-GJL-150

ASTM A48-150B

PES 30%GF

: 0 .. 40 °C

10  
G 1 1/2  
PN 10  
130


- P1: 3 .. 18  
50 Hz  
1 x 230 V  
: 0.04 .. 0.18 A  
(IEC 34-5): X4D  
(IEC 85): F

(EEI): 0.15  
1.88  
2  
0.004 <sup>3</sup>



:  
: 0 .. 40 °C  
: 10  
: G 1 1/2  
: PN 10  
: 130  
-P1: - : 3 .. 18  
: 50 Hz  
: 1 x 230 V  
: 0.04 .. 0.18 A  
(IEC 34-5): X4D  
(IEC 85): F  
:  
(EEI): 0.15  
: 1.88  
:  
: 2  
:  
: 0.004 <sup>3</sup>

## ALPHA2 25-40 130 50

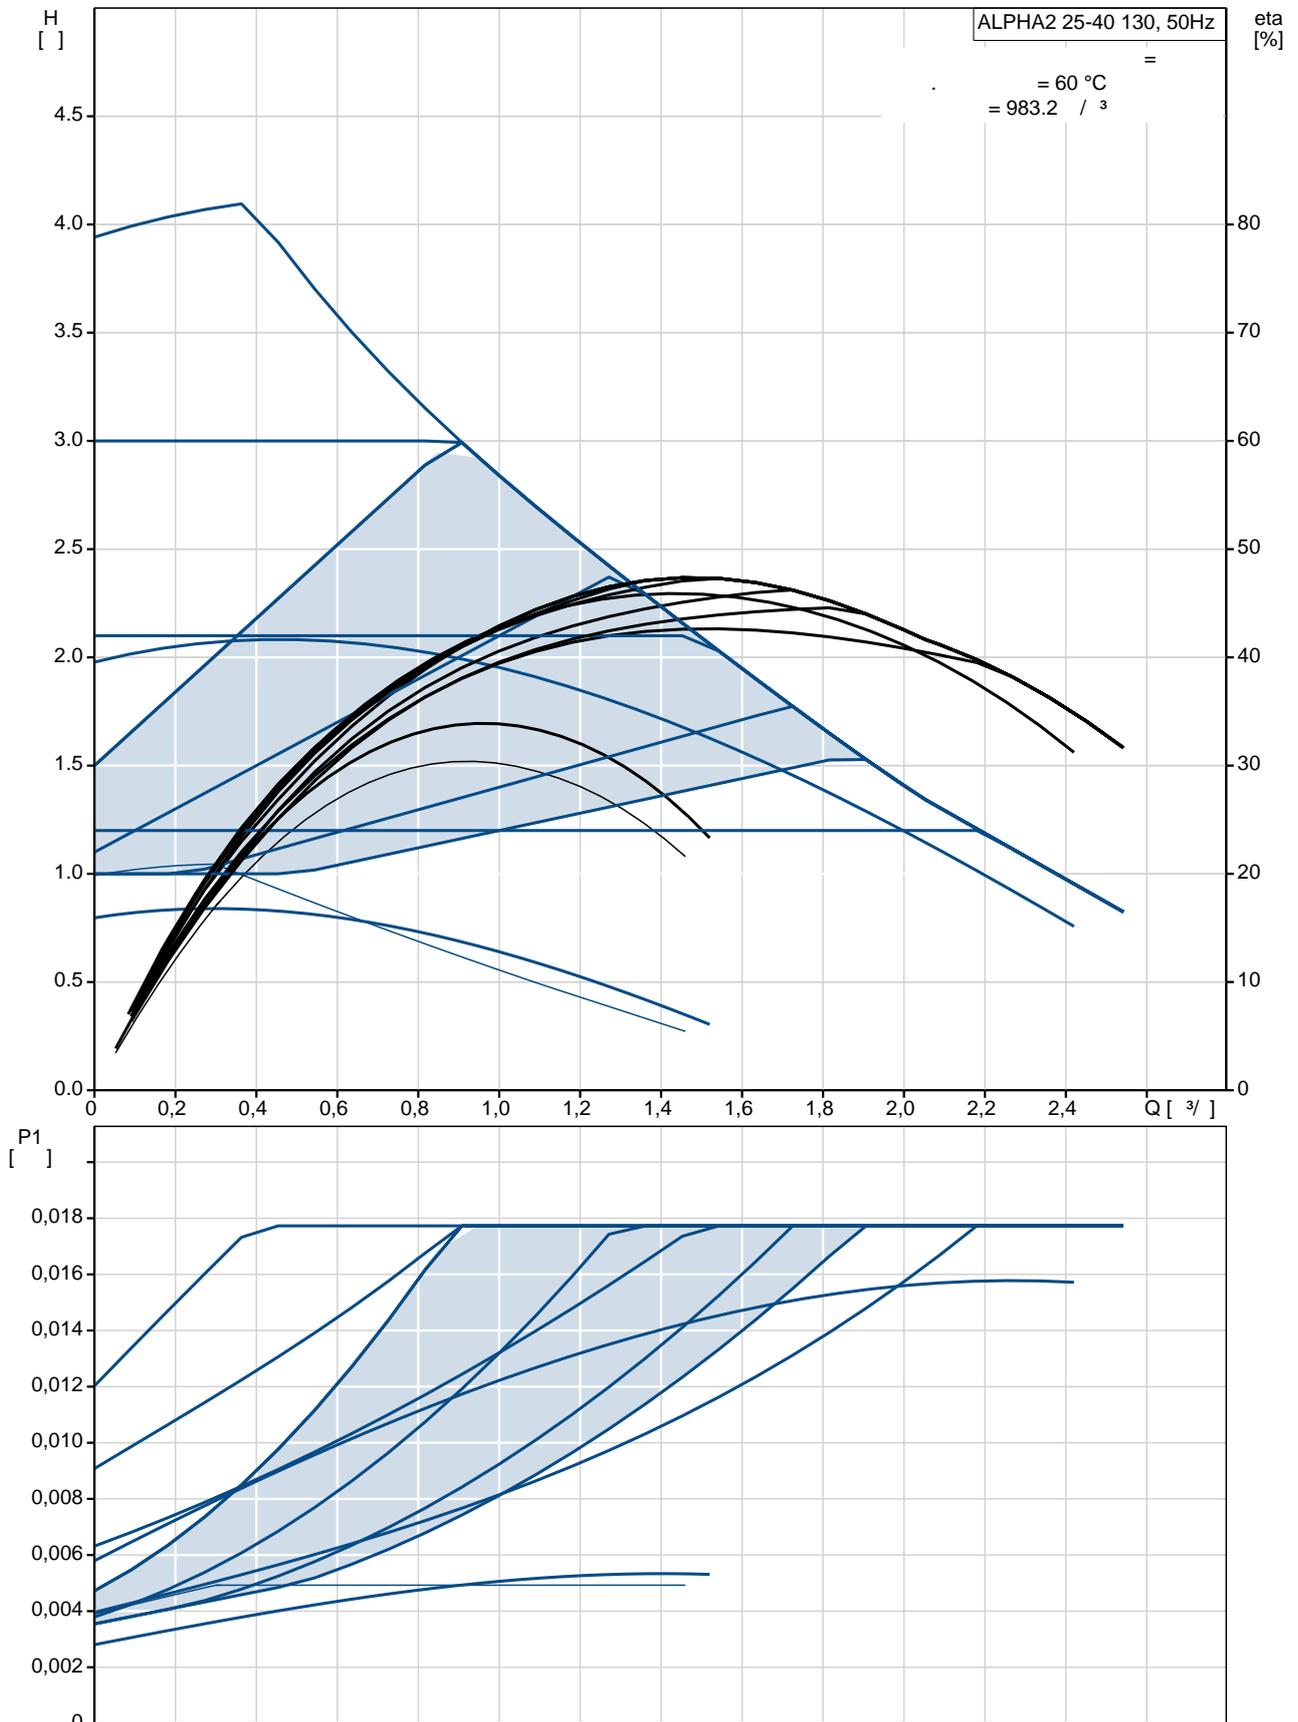

ALPHA2 25-40 130

EAN

TF

40  
110  
VDE,GS,CE  
D

EN-GJL-150  
ASTM A48-150B  
PES 30%GF

0 .. 40 °C




10  
G 1 1/2  
PN 10  
130

2 .. 110 °C  
60 °C  
983.2 / ³



..-P1: 3 .. 18  
50 Hz  
1 x 230 V  
0.04 .. 0.18 A  
(IEC 34-5): X4D  
(IEC 85): F  
ELEC

6H


(EEI): 0.15  
1.88  
2  
0.004 ³

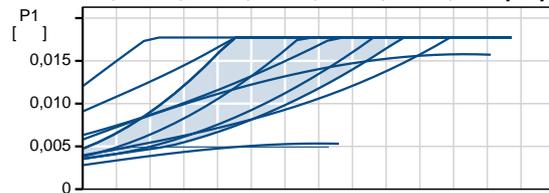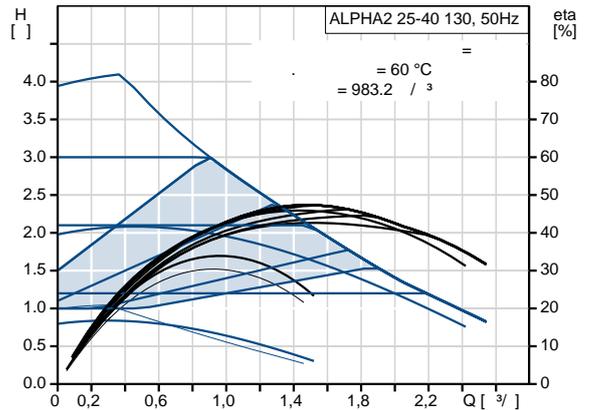

## ALPHA2 25-40 130 50

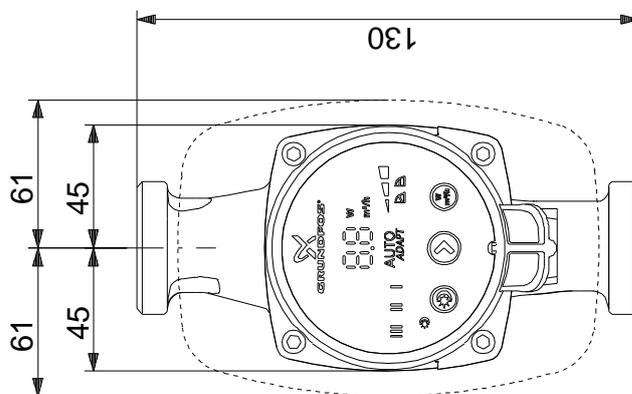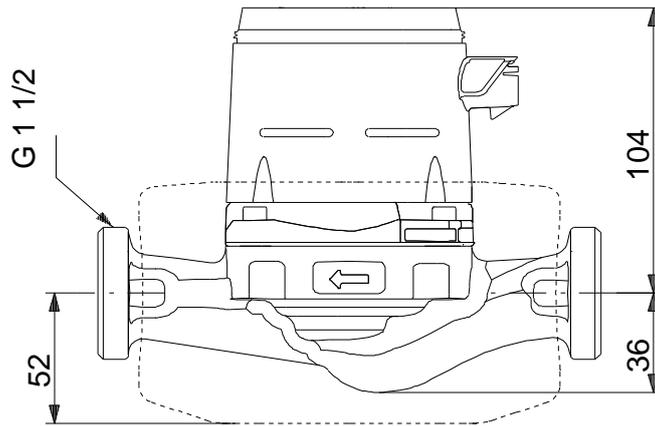

**ALPHA2 25-40 130 50**

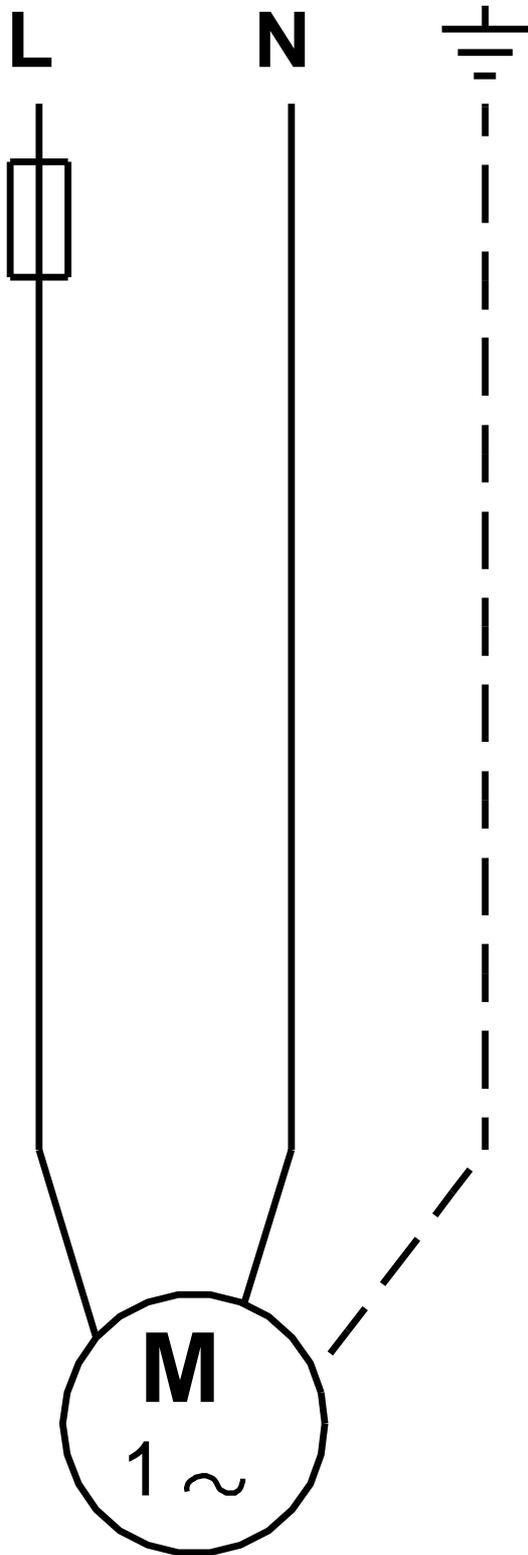

! [ ], .