


1 **MAGNA1 32-100**



MAGNA1 -

MAGNA1

MAGNA1

EuP.



: -10 .. 110 °C
 : 60 °C
 : 983.2 / 3

TF : 110
 : CE,VDE,EAC,CN ROHS

EN-GJL-200
 ASTM A48-200B
 PES 30%GF

:
: 0 .. 40 °C
: 10
: G 2"
: PN10
: 180
:
-P1: 8 .. 175
: 50 Hz
: 1 x 230
: 0.08 .. 1.41 A
(IEC 34-5): X4D
(IEC 85): F
:
(EEI): 0.21
: 4.38
:
: 4.78
:
: 0.012 ³

MAGNA1 32-100 50

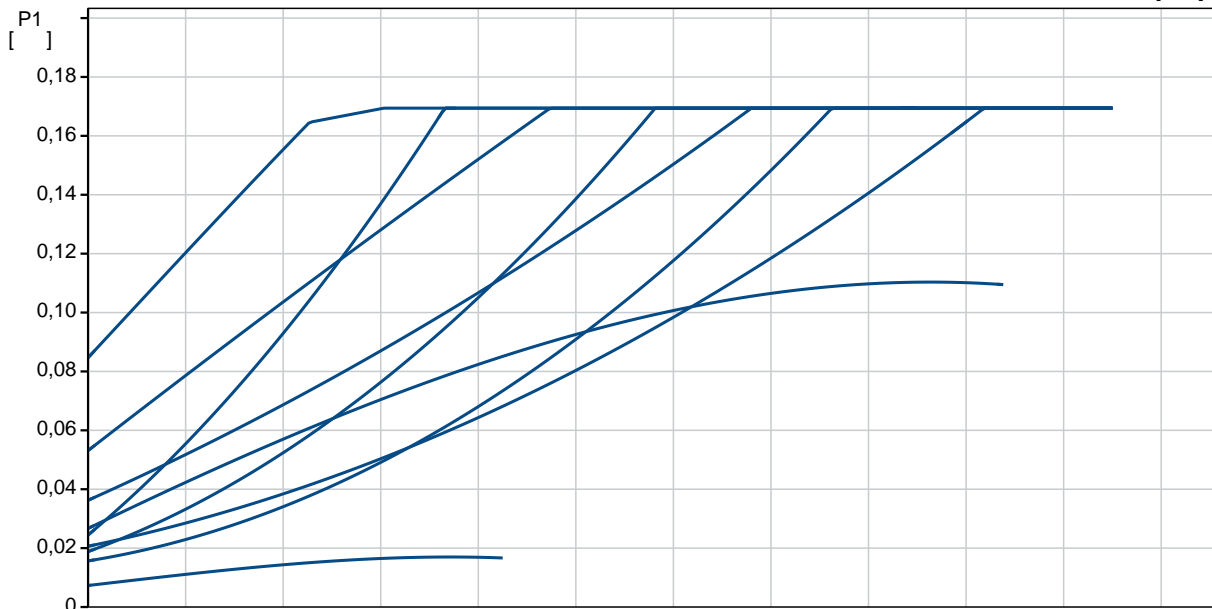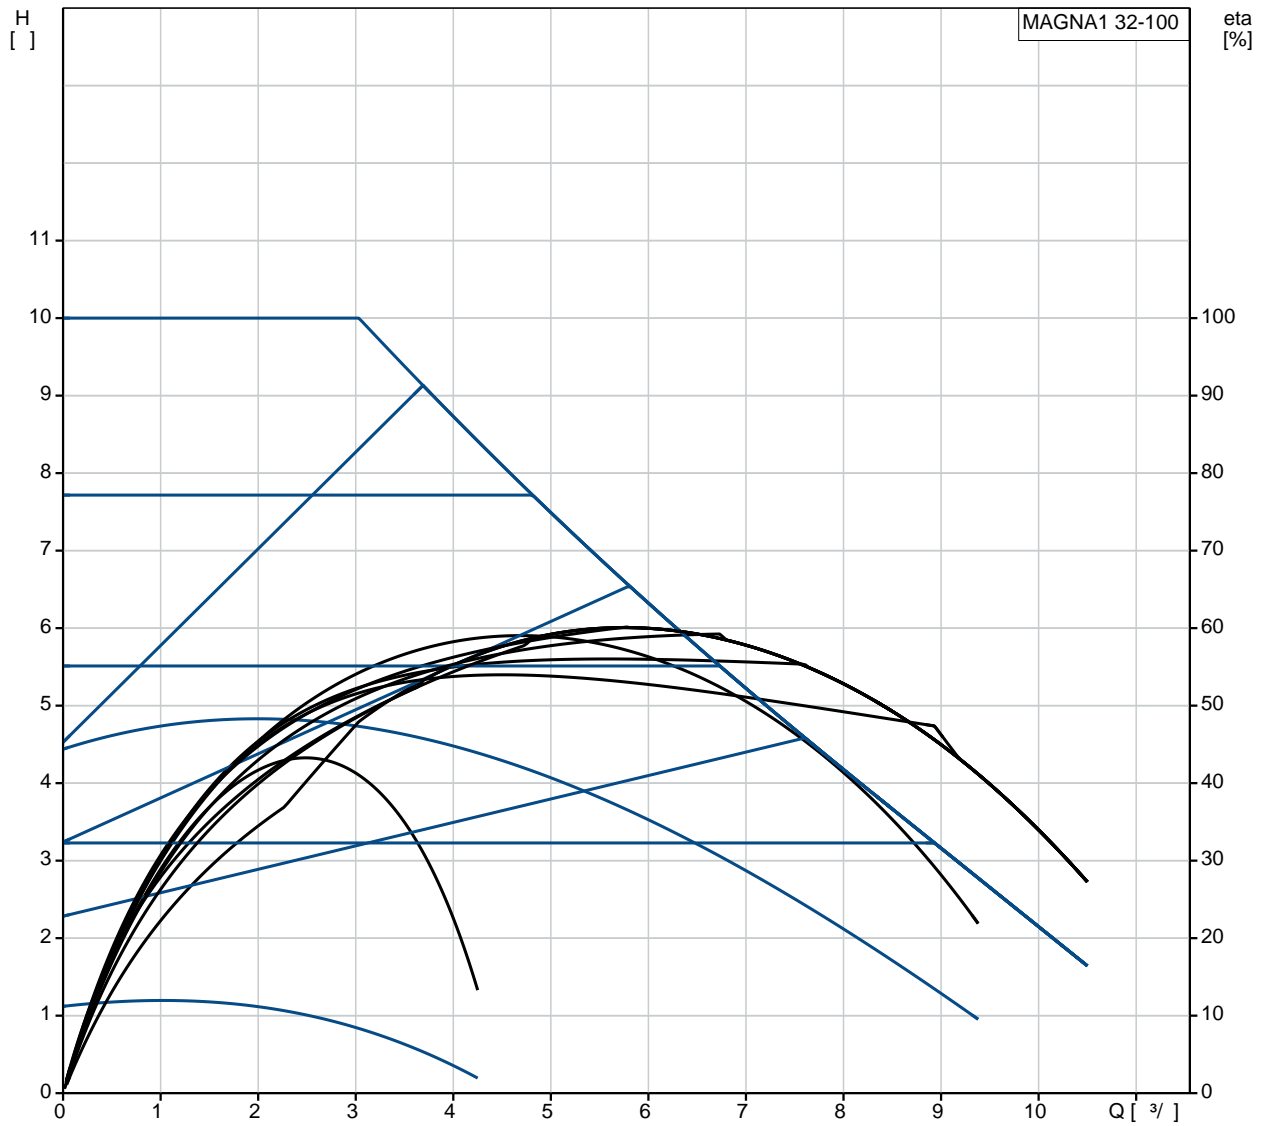

MAGNA1 32-100

EAN :

TF :

100
110
CE, VDE, EAC, CN ROHS
A

EN-GJL-200
ASTM A48-200B
PES 30%GF

0 .. 40 °C





10
G 2"
PN10
180

-10 .. 110 °C
60 °C


983.2 / ³

-P1: 8 .. 175
50 Hz
1 x 230
0.08 .. 1.41 A
(IEC 34-5): X4D
(IEC 85): F

(EEI): 0.21
4.38
4.78
0.012 ³

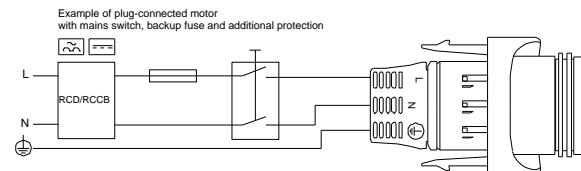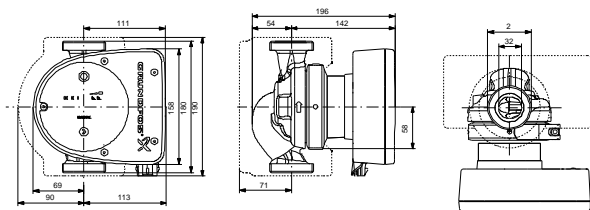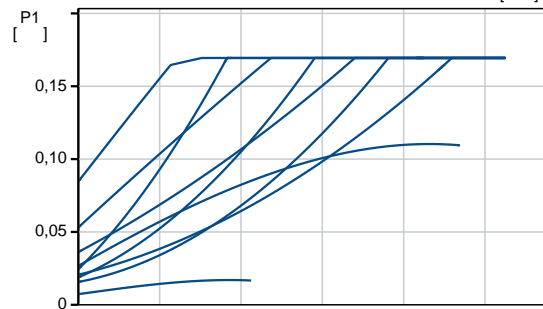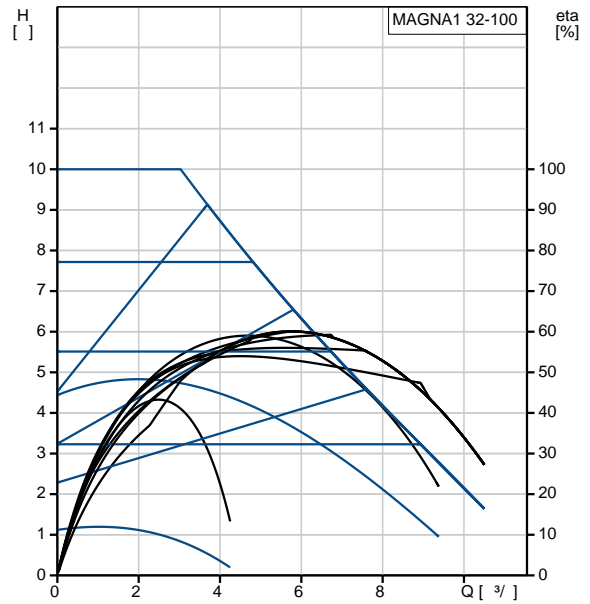


MAGNA1 32-100 50

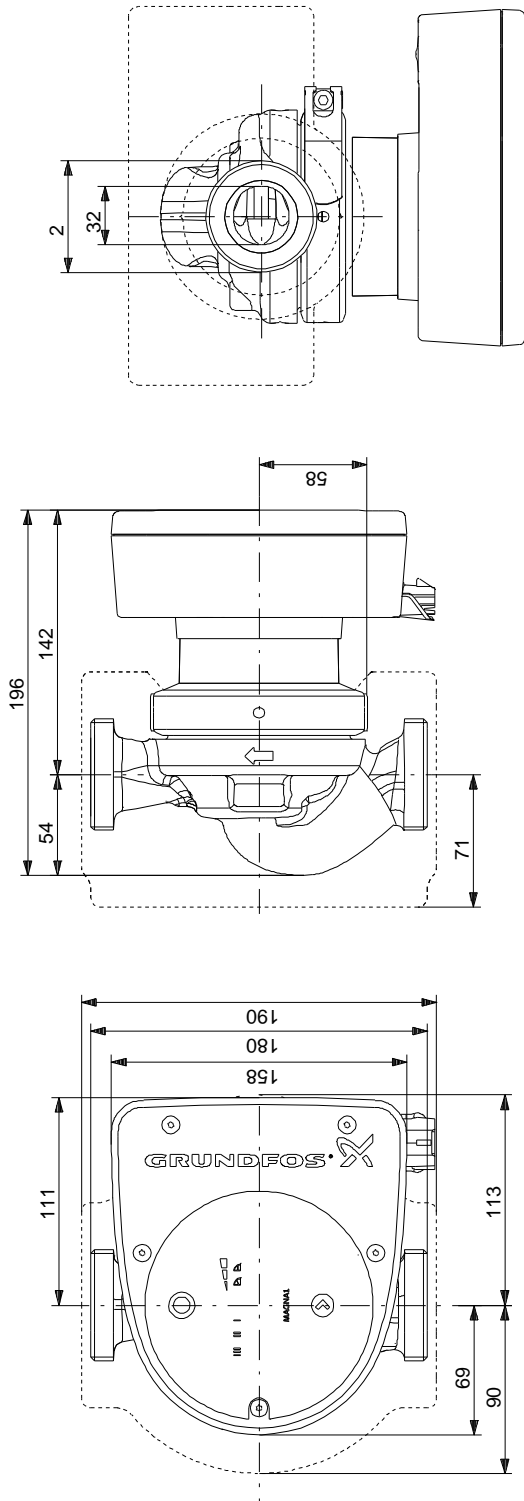

! []

MAGNA1 32-100 50

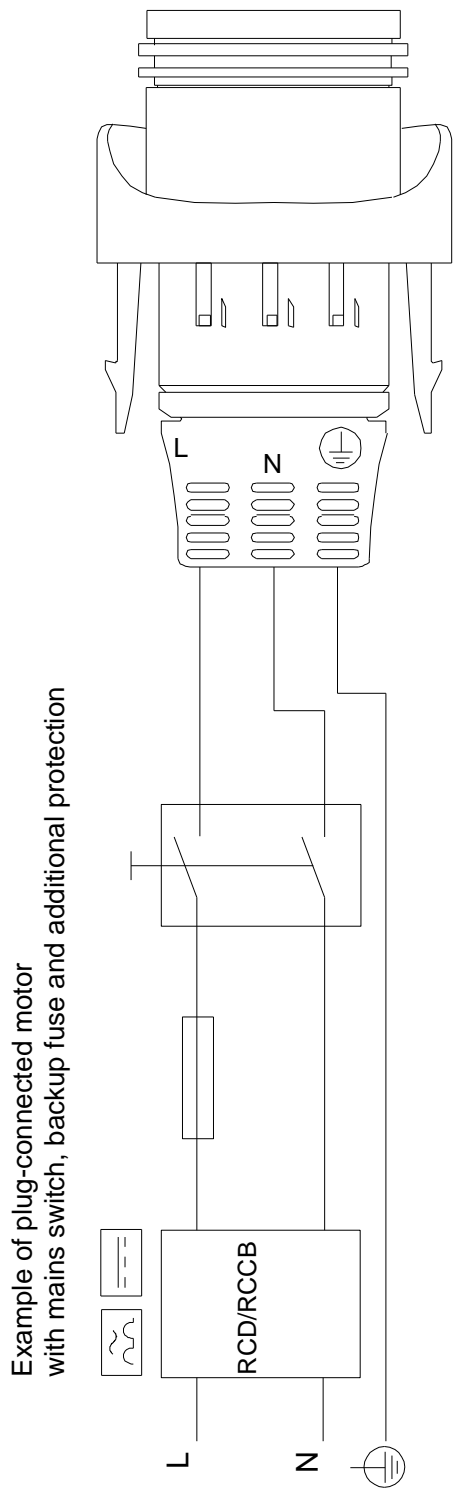

Example of plug-connected motor with mains switch, backup fuse and additional protection

! [], .